



Power Section Specification

213-5660
2.125" 5:6 Lobes 6.0 Stages

Rotor Specifications

Overall Length	83.00 in
Avg. Diameter	1.062 in
Contour Length	78.75 in
Eccentricity	0.087 in
Major Diameter	1.236 in
Head Diameter	1.375 in
Head Length	4.25 in
Weight	20 lb
Thread Form	M16-Mfg only

Stator Specifications

Overall Length	88.00 in
Tube OD	2.13 in
Contour Length	77.75 in
Tube ID	1.750 in
Rubber Cut-back	
Side 1:	5.12 in
Side 2:	5.12 in
Weight	33 lb
Material	Alloy Steel

Performance Specifications


Flow Range	20-50	GPM
Rev per Unit Volume	12.20	Rev/Gal
Speed Range	244-610	RPM
No Load Pressure Loss	74	psi
Max Rec Press	1,320 psi	1,460 psi
Torque @ Max Press	300 ft-lbs	330 ft-lbs
Stall Pressure	1,980 psi	2,180 psi
Stall Torque	450 ft-lbs	490 ft-lbs

Stator Minors and Fit (in) at 70°F


Group	POB-PRR-PXP			280XT		
	Minor	Fit		Minor	Fit	
0	1.065	-0.003				
4	1.070	-0.008				
7	1.074	-0.012		1.067	-0.005	

Reline Lengths (in)	Monoflo:	Max	-	Min	-	R&M:	Max	-	Min	-	Alternate Stator OD (in):	- / -
---------------------	----------	-----	---	-----	---	------	-----	---	-----	---	---------------------------	-------


Torque

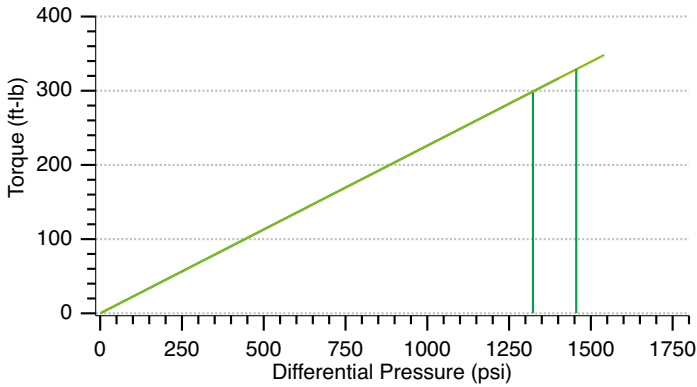

Fit Increase

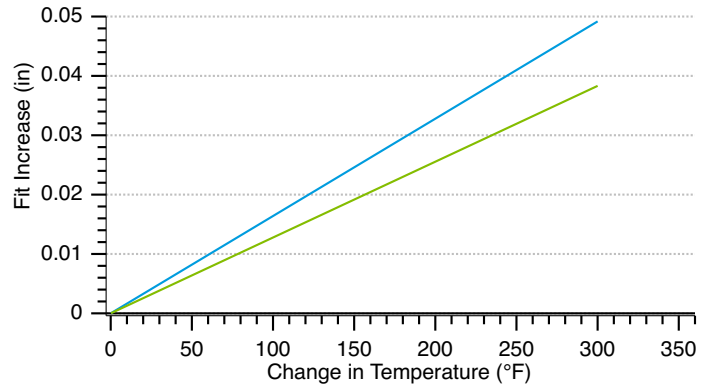

Speed

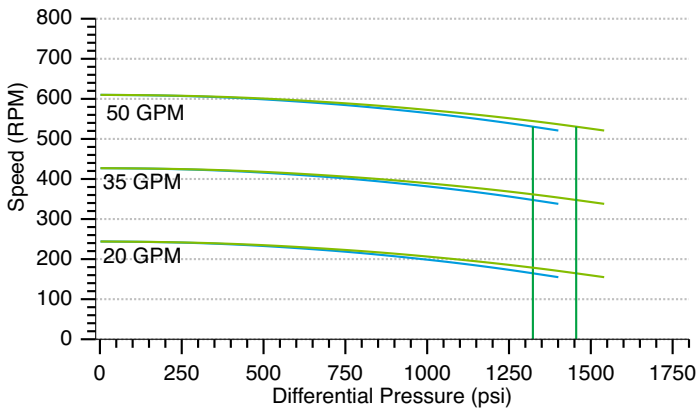

Mechanical Power

